

Hunter PT200

ProAlign® alignment system for heavy-duty trucks

NEW!



HUNTER
Engineering Company

PA280 ProAlign

HUNTER
Engineering Company

PT200 heavy-duty alignment system

The Hunter PT200 heavy-duty alignment system using ProAlign® 2 HD software includes the essential features needed to perform fast, accurate alignments.



Hunter PT260 shown with DSP740T sensors

✓ **Fast and powerful**

Linux-powered system equipped with a quad-core Intel® processor and full-speed USB support

✓ **User-friendly**

Operate anywhere in the bay with the hand-held wireless remote control

✓ **Wide-screen support**

24-in. wide-screen LCD comes standard

✓ **Measurement capability**

Measure camber, caster, toe, thrust angle, Steering Axis Inclination (SAI), Included Angle (IA), Toe-Out-On-Turns* and Maximum Steering Angle*

✓ **Multi-language support**

Available in 36 languages


✓ **Extensive specification database**

Includes more than 20 years of domestic specifications with customizable additions

✓ **Consistently up-to-date**

Easily update specifications and software yearly

Powerful software features reduce alignment times and increase productivity!

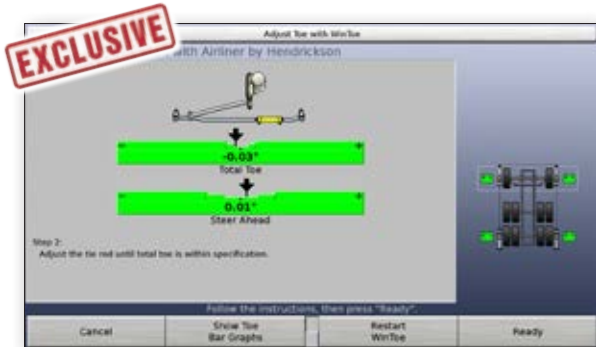


WinToe® Procedure

Allows technician to adjust toe without locking the steering wheel. Virtually ensures a straight steering wheel on the first try!



Adjustment Bar Graphs

Adjustment bar graph displays show the amount and direction of adjustment necessary.

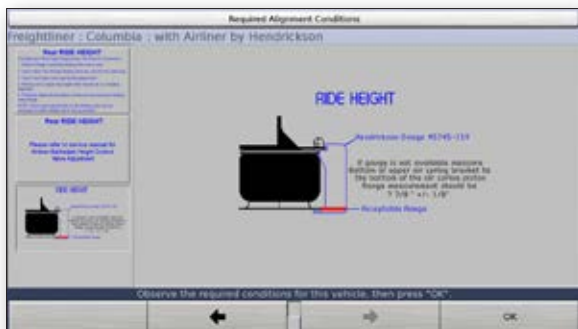


Vehicle-Specific Instructions

When special procedures are required, the instructions are provided on screen.



Work Management

Valuable customer information can be conveniently stored in the database, allowing shop personnel to quickly reference previous alignment work orders.

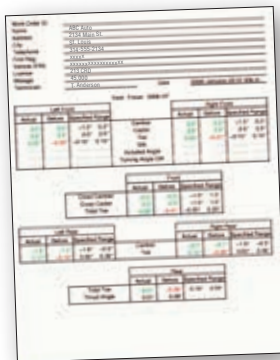


ProAlign® printouts help sell work

Explain needed parts and repairs and show completed work to customers using detailed, color-coded printouts.

Clear and detailed printouts help you communicate and build rapport with your customers and sell more alignments.

Fast, accurate alignment with DSP700T sensors

- ✓ Lightweight, rugged construction
- ✓ Cordless operation
- ✓ Pro-Comp® compensation ensures accurate measurements even if wheels rotate after compensation

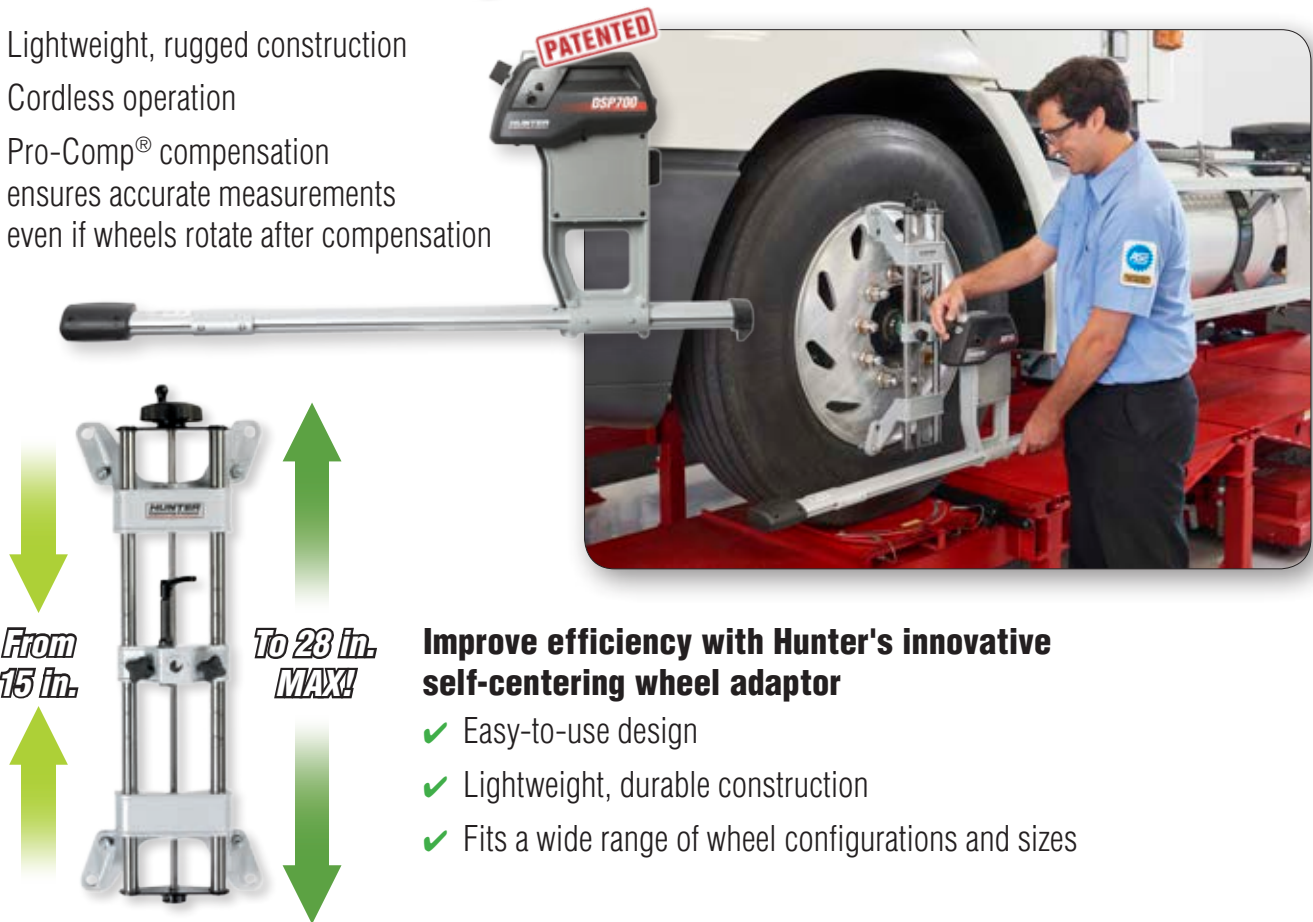

Improve efficiency with Hunter's innovative self-centering wheel adaptor

- ✓ Easy-to-use design
- ✓ Lightweight, durable construction
- ✓ Fits a wide range of wheel configurations and sizes

Specifications

Cabinet dimensions

Standard	65-68 in. (H) x 32 in. (W) x 25 in. (D)
With sensors	65-68 in. (H) x 55 in. (W) x 40.25 in (D)

Power requirements 100-240V, 3.5A-1.75A, 1-Ph, 50-60 Hz

Compatible sensors DSP740T (4 optical sensors, self-centering adaptors, storage brackets)

Standard Equipment

- ✓ Brake pedal depressor
- ✓ Steering wheel holder
- ✓ Color printer
- ✓ Keyboard and mouse
- ✓ Wireless remote control

Optional Equipment

- 20-2881-1 Icon Remote Indicator
- 25-1592-1 Heavy-duty turnplate ramp (for on-floor alignment)
- 20-2709-1 (2) Heavy-duty turnplates

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

ProAlign, WinToe and Pro-Comp are registered trademarks of Hunter Engineering Company.

1115EH

HUNTER
Engineering Company
www.hunter.com